


RoHS Compliant 

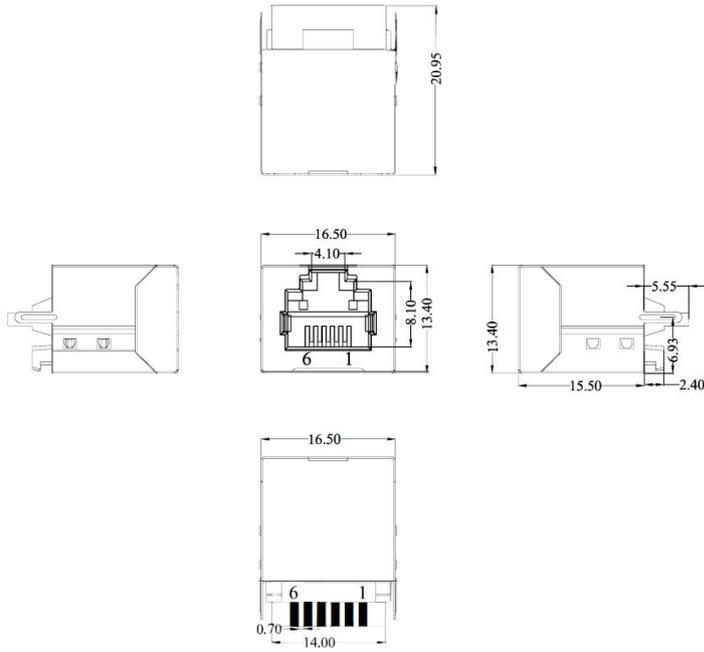

NOTES

MATERIAL

- 1.HOUSING : PBT UL94V-0
- 2.HOLDER : LCP UL94V-0
- 3.CONTACT : PHOSPHOR BRONZE T=0.3mm.
- 4.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING, TAILS PLATING TIN OVER NICKEL.
- 5.SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC.
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL


- 1.DURRABILITY : 750 CYCLES MIN.
- 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.


ENVIRONMENTAL:

- 1.STORAGE : -40℃~+85℃.
- 2.OPERATION : -20℃~+70℃.

52M 产品系列固定码	PART NO.	Gold Plating
5 PIN位码 / 5-6P6C	TM52M511EXX11	Fu"
11 窗口固定码 / 11-1X1	TM52M511EXX31	3u"
EX 外形码 / EX-屏蔽, 无弹	TM52M511EXX41	6u"
X LED固定码 / X-无灯	TM52M511EXX51	15u"
1 电镀识别码 / 1-Au G/F u"	TM52M511EXX61	30u"
1 系统识别码	TM52M511EXX71	50u"

TOLERANCES						APPROVAL				TITLE				
						东莞市谷诚电子科技有限公司				RJ11 JACK 6P6C 屏蔽无弹				
						GOOCHAIN TECHNOLOGY				PART NO. TM52M511EXX11				
171029	A	B	料号由TM-52M6611E变更为TM52M511EXX11	Ethan	Iven	PROJECT	APPROVAL	CHECK	DRAWN	DATA	UNIT	SCALE	CHECKED	REV
DATE	OLD REV	NEW REV	DESCRIPTION	CHECK	APPROVAL				Lucky_qin	2017/10/13	MM	1:1		A4

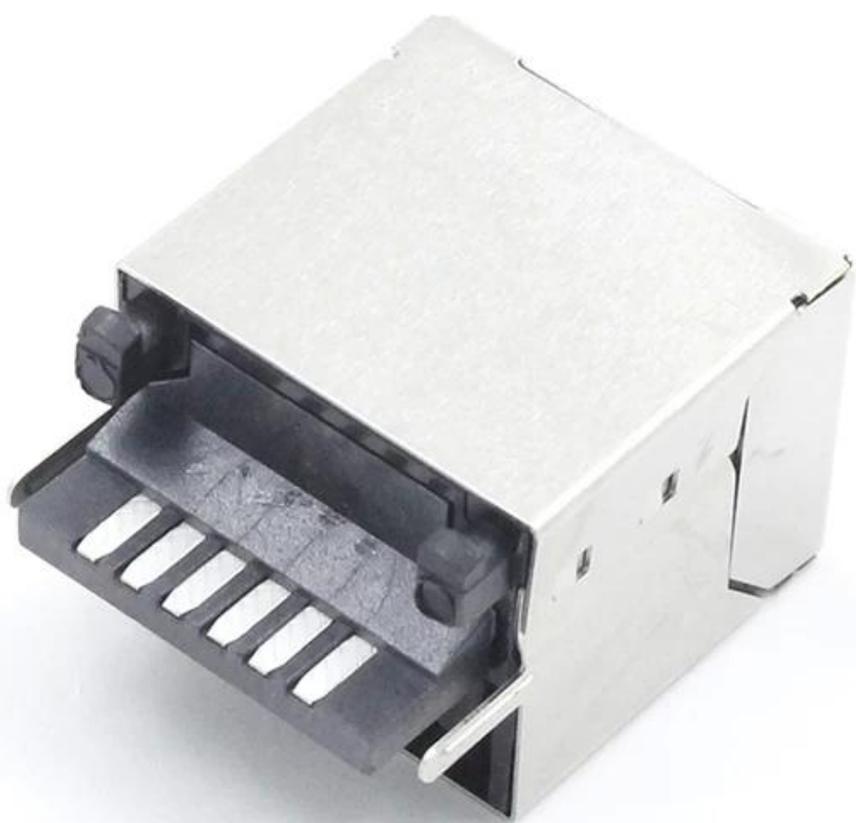

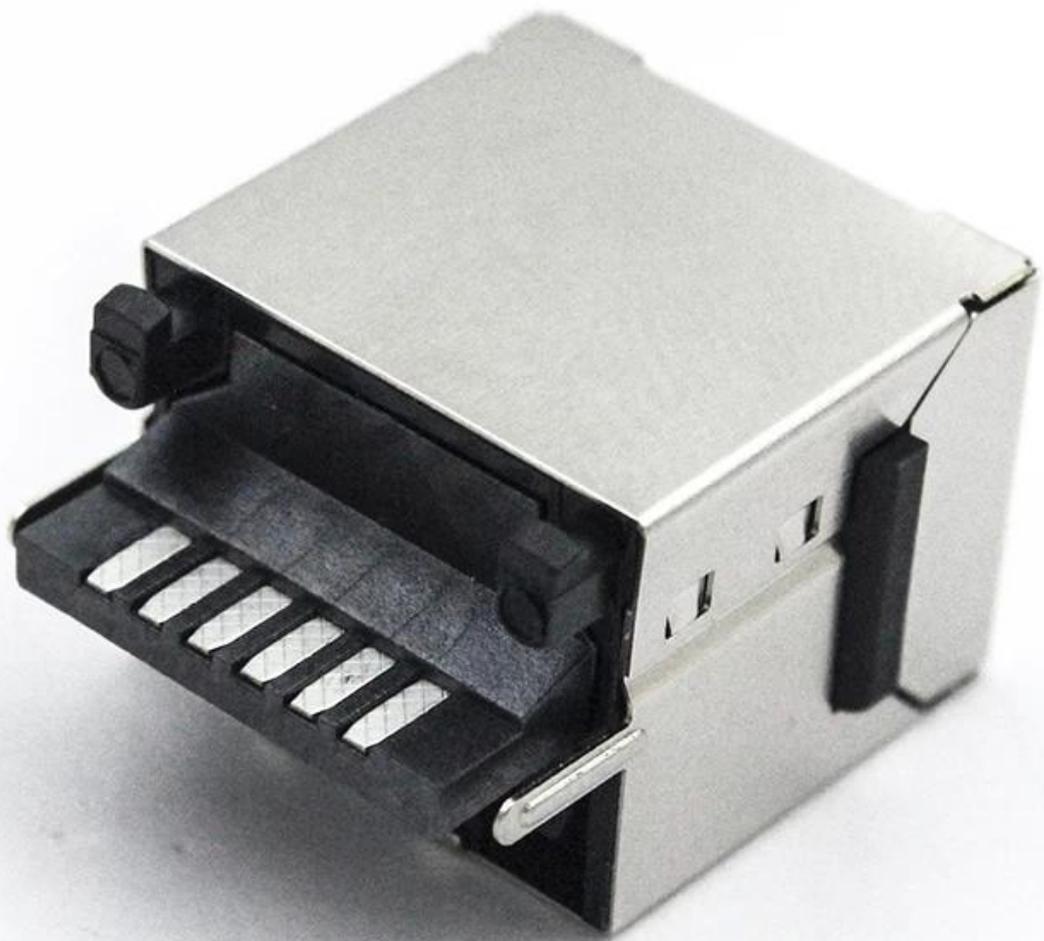





RJ12 6P6C

Goochain Technology Co., Ltd. USB ECG
PoweredUSB 2015
2000 1 1 8
ISO

