



RoHS+HF (Pb)
Compliant


F
E
D
C
B





TOP VIEW




FRONT VIEW




RIGHT SIDE VIEW




BACK VIEW



LEFT SIDE VIEW



BOTTOM VIEW



A SIZE:4.5:1

U型焊盘, 背面加凸点

NOTES

MECHANICAL:

1. HOUSING MATERIAL: HF PBT BLACK UL94V-0
2. INSERT MATERIAL: LCP BLACK UL94V-0
3. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.25mm.
4. PLATING: GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100u" MIN, NICKEL 30u" MIN. OVER ALL
5. SHIELD: BRASS T=0.20mm PLATED NICKEL 30u" Min .
6. OPERATING LIFE: 750 CYCLES MIN.
7. MATING/UNMATING FORCE: 30N/3.06KGf MAX
8. RETENTION STRENGTH: 50N MIN. FOR 60S±5S


ELECTRICAL:


1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE : 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC .
5. DIELECTRIC STRENGTH: 1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C RELATIVE HUMIDITY<80%.
2. GUARANTEE PERIOD: 12 MONTHS
3. OPERATION: -40°C TO +85°C.
4. The mark with ★ is the key inspection dimension for QC

NO.	PACKING	PART NO.	Gold Plating
1	TRAY 100PCS/盒 2000PCS/箱 纸箱尺寸: 394*275*500MM	TM52W811EX002312113000	1u"
2		TM52W811EX003312113000	3u"
3		TM52W811EX004312113000	6u"
4		TM52W811EX005312113000	15u"
5		TM52W811EX006312113000	30u"
6		TM52W811EX007312113000	50u"

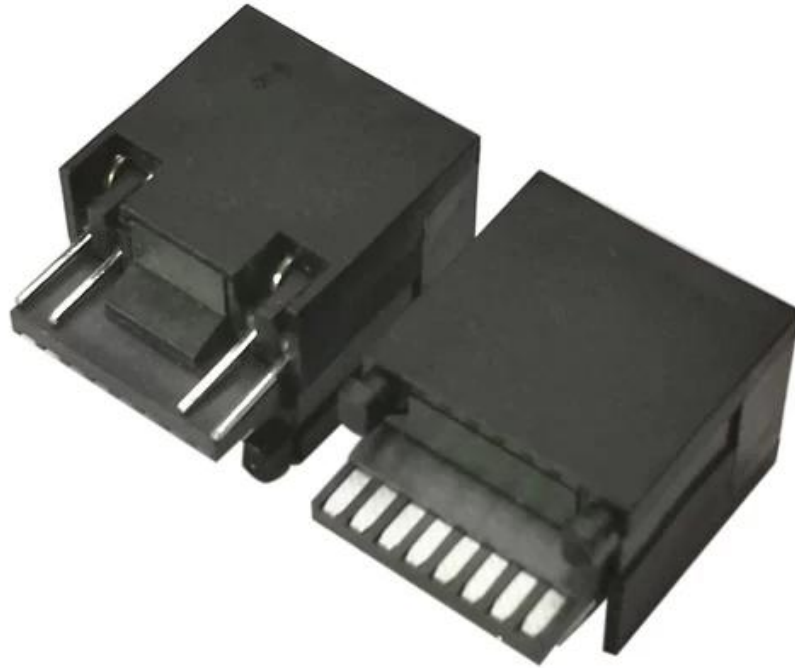

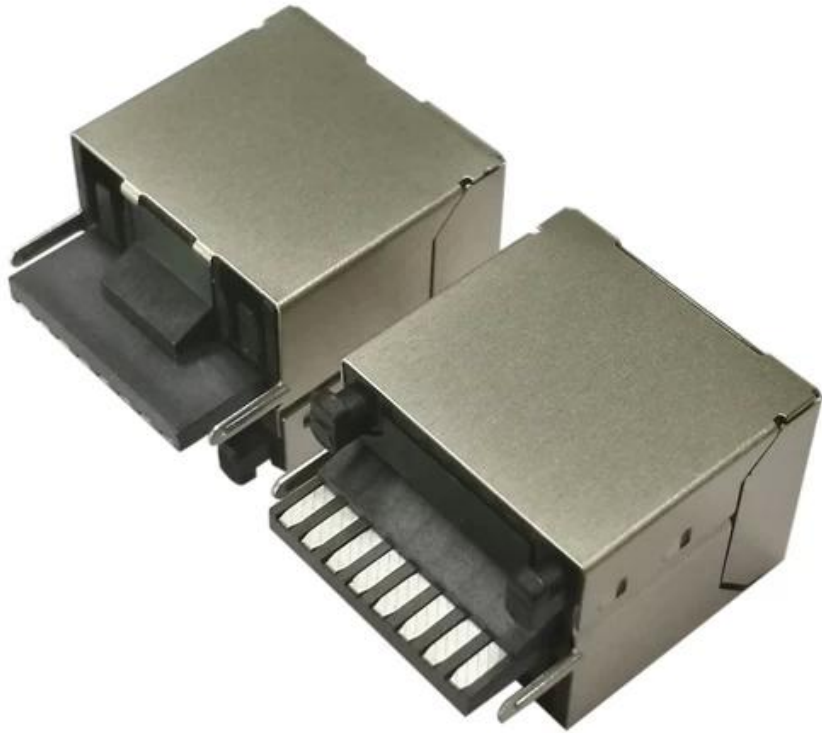

支架LCP材料耐高温

Sodering [RJ45 8P8C](#) [RJ45 8P8C](#)

Goochain [USB](#) [Powered USB](#) [ECG 2015](#) [80](#) [2000](#) [1](#) [8](#) [ISO](#)

